



落ちふた式U形側溝（本体）

（例 1-300A）

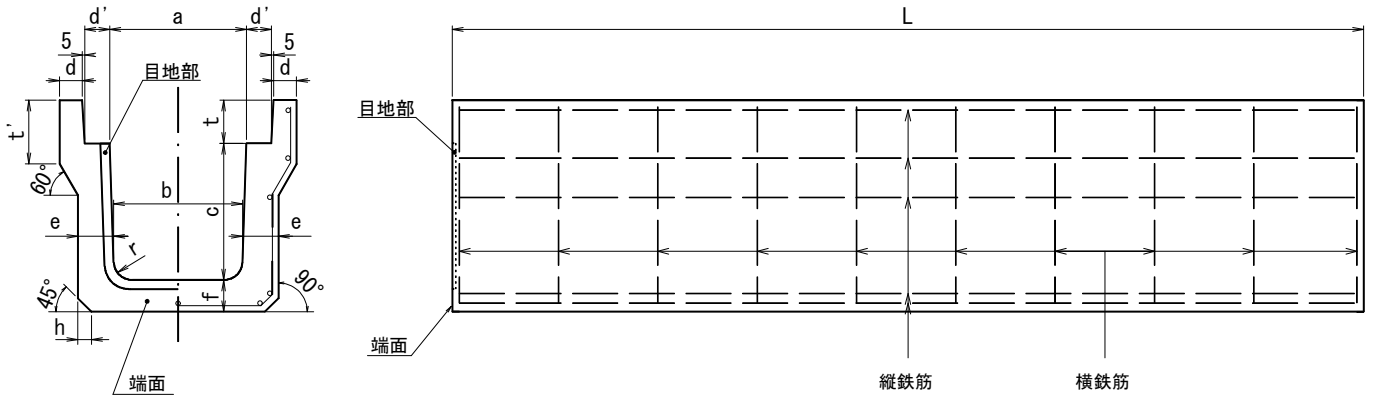

（例 3-300A）

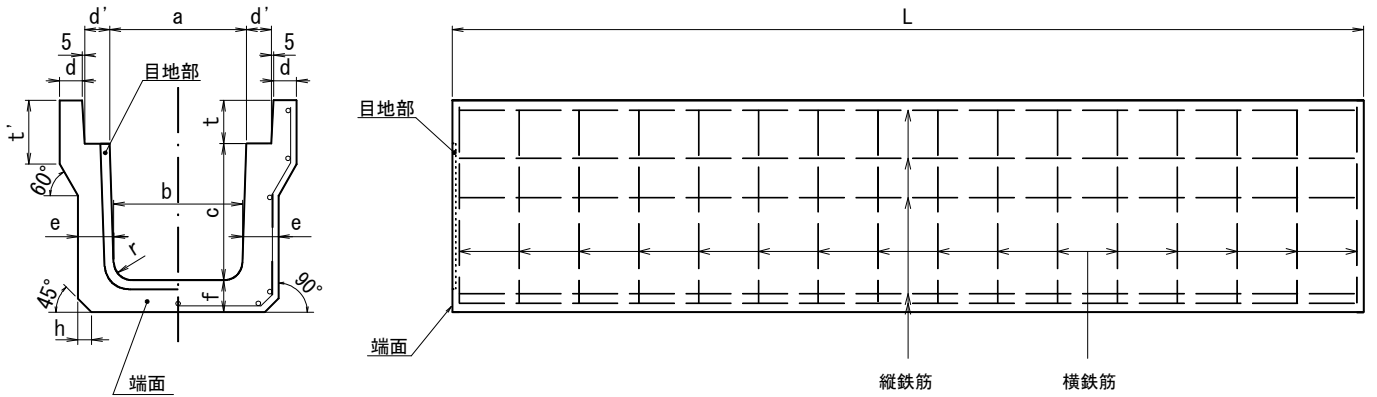

単位:mm

種類	呼び	寸 法											配 筋								
		a	b	c	d	d'	e	f	h	t	t'	r	L	横鉄筋(外側筋)		横鉄筋(底版筋)			縦鉄筋		
		径又は呼び	L=2m	L=1m	径又は呼び	L=2m	L=1m	径又は呼び	数量(本)												
1種	250	250	230	250	40	55	55	55	20	90	120	50	2000 又は 1000	4.00	10	6	—	4.00	11		
	300A	280	300	60			60	13													
	300B	300	270	400			65	65		95				15							
	300C	260	500	70			70	14													
	400A	400	370	400	65	65	110	135	5.00	16											
	400B	360	500	70	70	17															
	500A	500	460	500	75	75	125	150	D6	21											
	500B	450	600	45	60	75	75	125	150												
3種	250	250	230	250	50	55	65	65	30	90	140	50	2000 又は 1000	D6	14	7	—	—	—	4.00	11
	300A	280	300	70			70	16		8					15						
	300B	300	270	400			70	70		19				11	11	17					
	300C	260	500	80			80	21		11				17							
	400A	400	370	400	70	70	40	110	D6	23	12	D6	12	6	4.00	19					
	400B	360	500	80	80	125	155	20													
	500A	500	460	500	80	80	125	155	175	25	13	7	24								
	500B	450	600	60	60	90	90														
許容差		±3					—	±3	—	±6	—										

※L=2mと1mの箇所の数字は、鉄筋本数とする。
又、1種500Bの横鉄筋のD6は、Φ6.00でもよい。